


RACK MOUNT LEAD ACID BATTERY

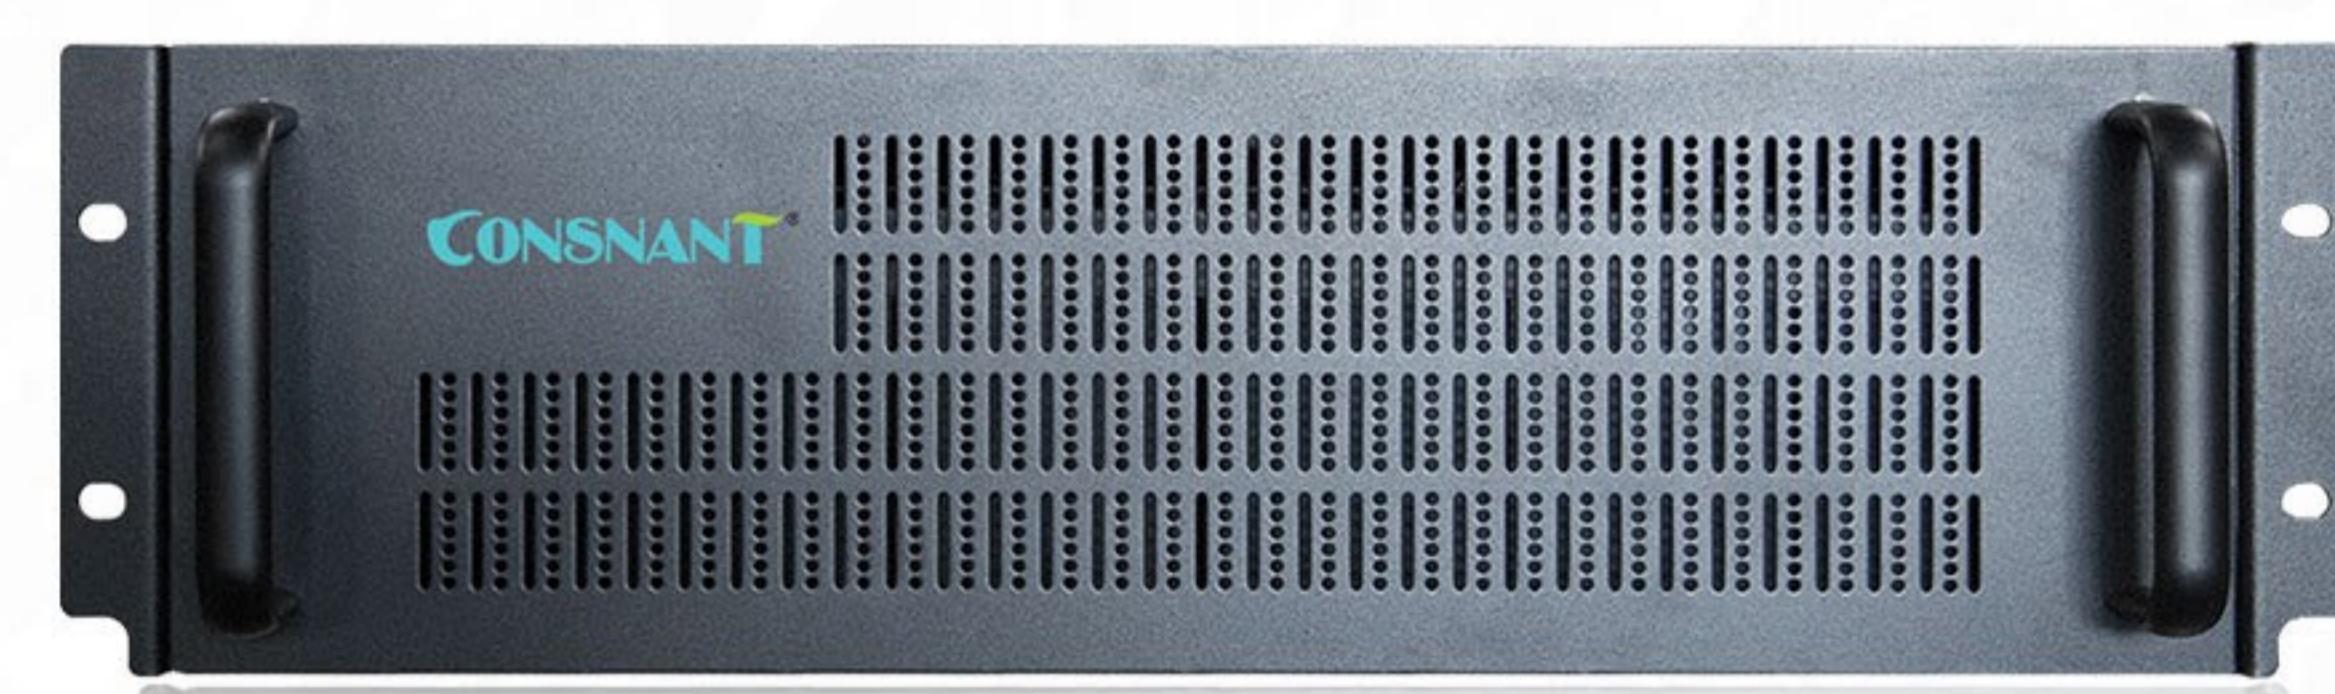

CNB-LA192, CNB-LA240

Description

The CNB-LA192/240 rack-mount external battery pack offers extended battery runtime when used in conjunction with expandable CNB-LA192/240 rack-mountable UPS systems.

It includes heavy gauge cabling with high current DC connector for safe & simple installation. Included mounting accessories support 3U rack-mount installation.

Product Highlights

- ◆ Extended-run battery systems provide flexible runtime to critical applications
- ◆ Supports 3U rack-mount installation
- ◆ Simple & Easy Installation
- ◆ Mounting brackets included
- ◆ Package Includes batteries and interconnect DC cables
- ◆ Sliding rail-kits (optional)
- ◆ All devices are fully tested and verified for maximum performance.

Product Parameter

Model	CNB-LA192	CNB-LA240
Capacity (Max)	192VDC- 7/9Ah	240VDC- 7/9Ah
Input Specification		
Battery Type	VRLA Maintenance Free Sealed Lead Acid Battery	
DC System Voltage (VDC)	192VDC	240VDC
AH Capacity	7Ah / 9Ah	
Qty In Series	16	20
Standard Charging Current	4-6 Hours to 90% (Depends On UPS Charging Current)	
Environmental Specification		
Operating Temp	0 - 40°C	
Storage Temperature	-15 - 45°C	
Operating Relative Humidity	0 - 95%	
Physical Specification		
Material Of Construction	Steel	
External Battery Pack Form Factor	Standard 19" Rack Type	
Colour	Black	
Height	3U	
Size (mm)	130 x 482.1 x 624.8 (H*W*L)	
Weight (Kg)	49.5	61.5

CONSNANT

shenzhen Consnant Technology Co., Ltd
Building B6, Junfeng Industrial Park, Yonghe Road,
Fuhai Sub-District, Bao'an District, Shenzhen City, 518103 P.R.China.

Web: www.consnant.com
T e l: 0086-755-29772323
F a x: 0086-755-29772626